


THIS SHEET INCLUDES FITTING INSTRUCTIONS FOR THE FOLLOWING PARTS:


Secondary Alternator Cover Part No. EC-MT07-2014-1-GBR / Secondary Clutch Cover Part No. EC-MT07-2014-2-GBR /
Secondary Water Pump Cover Part No. EC-MT07-2014-5-GBR / Bullet Frame Race Slider Set STREET Part No. FS-R7-2022-S /
Bullet Frame Race Slider Set RACE Part No. FS-MT07-2014-S

SECONDARY ALTERNATOR COVER – PART NO. EC-MT07-2014-1-GBR

1. Place your bike in an upright position when fitting the Alternator as you will lose a small amount of engine oil when you remove **Bolt 3**.
2. Remove 4 existing bolts from the stock Alternator cover, shown as position Bolt 1, 2, 3 & 4.
2. Place the Secondary Alternator Cover over the stock cover.
3. Assemble 4 replacement **M6X50A2** bolts loosely in the correct position as shown.
4. Tighten bolts to a Torque of 10Nm as per Manufacturer's recommendations. **DO NOT OVERTIGHTEN.**

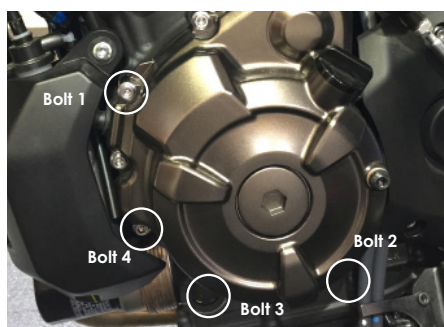

Bolt 1
M6X50A2 - 10Nm

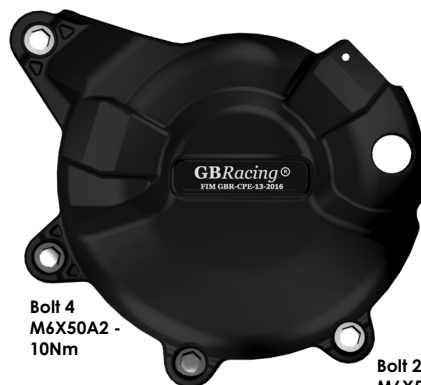

Bolt 4
M6X50A2 - 10Nm



Bolt 3
M6X50A2 - 10Nm

Bolt 2
M6X50A2 - 10Nm

SECONDARY CLUTCH COVER
PART NO. EC-MT07-2014-2-GBR

Please note: When fitting to the Yamaha Ténéré 700, please remove the small OE plastic cover before fitment.

1. Remove 4 existing bolts from the stock Clutch cover, shown as position Bolt 1, 2, 3 & 4.
2. Place the Secondary Clutch Cover over the stock cover.
3. Assemble 4 replacement bolts loosely in the correct positions as shown.
4. Tighten bolts to a Torque of 10Nm as per Manufacturer's recommendations. **DO NOT OVERTIGHTEN.**

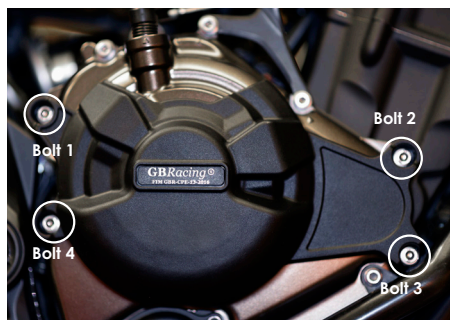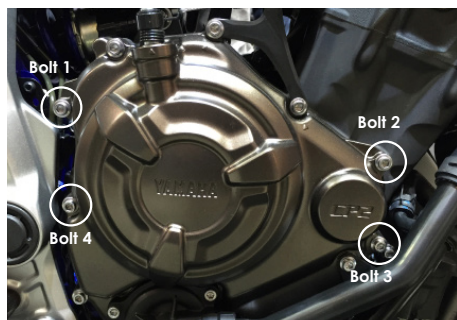

Bolt 1
M6X35A2 - 10Nm



Bolt 2
M6X35A2 - 10Nm

Bolt 3
M6X35A2 - 10Nm

Bolt 4
M6X35A2 - 10Nm




SET: Engine Cover Set: EC-MT07-2014-SET-GBR

Secondary Alternator Cover Part No. EC-MT07-2014-1-GBR / Secondary Clutch Cover Part No. EC-MT07-2014-2-GBR

SECONDARY WATER PUMP COVER – PART NO. EC-MT07-2014-5-GBR

Please note:

- Always fit with a cold engine.
 - Coolant may leak whilst fitting the protective cover, so prepare with a container underneath the bike.
1. Remove 3 existing bolts from the stock water pump cover, shown as position Bolt 1, 2 & 3.
 2. Place the Secondary water pump cover over the stock cover.
 3. Assemble 3 replacement **M6X25A2** bolts loosely in the correct position as shown.
 4. Tighten bolts to a Torque of 10Nm as per Manufacturer's recommendations.
DO NOT OVERTIGHTEN.
 5. Check coolant levels.

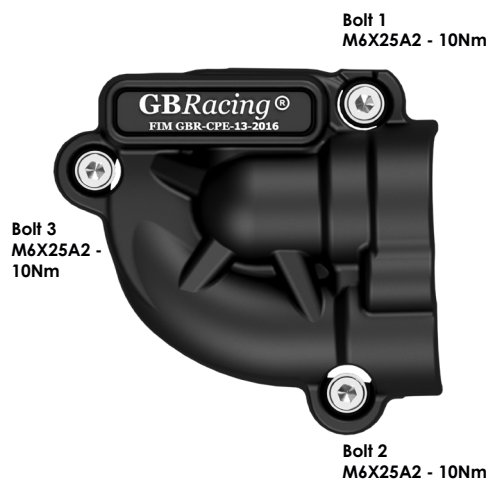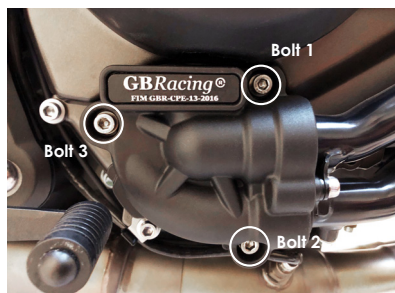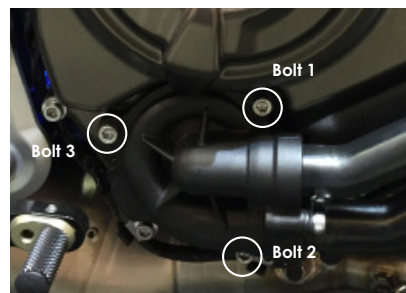

Please note: BULLET FRAME SLIDERS:

Nearside/offside fairing may require drilling dependent the manufacture year of bike. If you cannot see your forward engine mount, drilling may be required.

BULLET FRAME SLIDER - RIGHT HAND SIDE - STREET
– PART NO. FS-R7-2022-RHS-S

BULLET FRAME SLIDER - LEFT HAND SIDE - STREET
– PART NO. FS-R7-2022-LHS-S

Please note: when fitting the frame sliders to the R7, please reuse the OE washers from the engine mount bolts.



INSTRUCTIONS FOR THESE PARTS:


1. Remove front engine mounting bolt, located through the fairing opening.
2. Assemble bolt through the aluminium bush into correct position.

3. Tighten to 75NM torque.
4. Slide bullet moulding onto aluminium bush.
5. Screw M6 bolt into front of bullet moulding hand tight.

Please note: THESE FRAME SLIDERS (FS-MT07-2014-S) ARE THE RACE VERSION FOR THE YZF-R7 MODEL:

BULLET FRAME SLIDER - LEFT HAND SIDE - RACE
PART NO. FS-MT07-2014-LHS-S

BULLET FRAME SLIDER - RIGHT HAND SIDE - RACE
PART NO. FS-MT07-2014-RHS-S



INSTRUCTIONS FOR THESE PARTS:

1. Remove upper engine mounting bolt.
2. Assemble bolt through the aluminium bush into correct position.

3. Tighten to 75NM torque.
4. Slide bullet moulding onto aluminium bush.
5. Screw M6 bolt into front of bullet moulding hand tight.