


THIS SHEET INCLUDES FITTING INSTRUCTIONS FOR THE FOLLOWING PARTS:

Secondary Alternator Cover Part No. EC-ZXR400-2018-1-GBR / Secondary Clutch Cover Part No. EC-ZXR400-2018-2-GBR /
Secondary Water Pump Cover Part No. EC-ZXR400-2018-5-GBR /


SECONDARY ALTERNATOR COVER
PART NO. EC-ZXR400-2018-1-GBR

1. Remove nearside lower belly panel. The lower part of the main fairing panel will need to be loosened to allow for access to bolt 3 in terms of its removal and replacement.
2. Remove 4 existing bolts from the stock alternator cover, shown as position bolt 1, 2, 3 & 4.
3. Place the secondary alternator cover over the stock cover.
4. Assemble 4 replacement bolts loosely in the correct positions as shown: 3 x M6X40HHF & 1 x M6X45HHF.
5. Tighten bolts to a torque of 11Nm as per manufacturer's recommendations. DO NOT OVERTIGHTEN.
6. Re-fit lower belly panel.





SECONDARY CLUTCH COVER
PART NO. EC-ZXR400-2018-2-GBR

1. Remove lower fairing panel.
2. Remove 4 existing bolts from the clutch cover, shown as position bolt 1, 2, 3 & 4.
3. Place the secondary clutch cover over the stock cover.
4. Assemble 4 replacement bolts M6X30HHF loosely in the correct position as shown.
5. Tighten bolts to a torque of 11Nm as per manufacturer's recommendations. DO NOT OVERTIGHTEN.
6. Re-fit lower fairing panel.



SECONDARY WATER PUMP COVER
PART NO. EC-ZXR400-2018-5-GBR

1. Remove lower fairing panel.
2. Remove 3 existing bolts from the water pump cover, shown as position bolt 1, 2, & 3.
3. Place the secondary water pump cover over the stock cover.
4. Assemble 3 replacement bolts M6X55HHF loosely in the correct position as shown.
5. Tighten bolts to a torque of 11Nm as per manufacturer's recommendations. DO NOT OVERTIGHTEN.
6. Re-fit lower fairing panel.

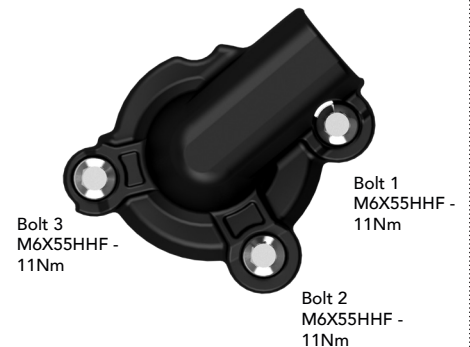

Engine Cover Set: EC-ZXR400-2018-SET-GBR

EC-ZXR400-2018-1-GBR, EC-ZXR400-2018-2-GBR, EC-ZXR400-2018-5-GBR