



899 2014

# FITTING INSTRUCTIONS TO BE FITTED BY A QUALIFIED TECHNICIAN



THIS SHEET INCLUDES FITTING INSTRUCTIONS FOR THE FOLLOWING PARTS:

Secondary Alternator Cover Part No. EC-899-2014-1-GBR / Secondary Clutch Cover Part No. EC-899-2014-2-GBR



## SECONDARY ALTERNATOR COVER PART NO. EC-899-2014-1-GBR

1. Remove the left hand side fairing panel.
2. Remove the 4 standard bolts as shown in Fig 1.
3. Place the secondary alternator cover against the standard alternator.
4. Insert the 4 supplied bolts and tighten to 8Nm as per Manufacturer's recommendations.  
DO NOT OVERTIGHTEN
5. Replace the left hand side fairing panel.

**Please note:** For models 959 2016-2019 & V2 2020, the fairing will need modification, dust cover removing & starter solenoid moving.


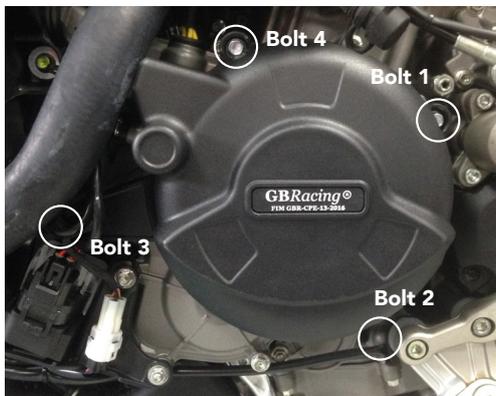





Fig. 1

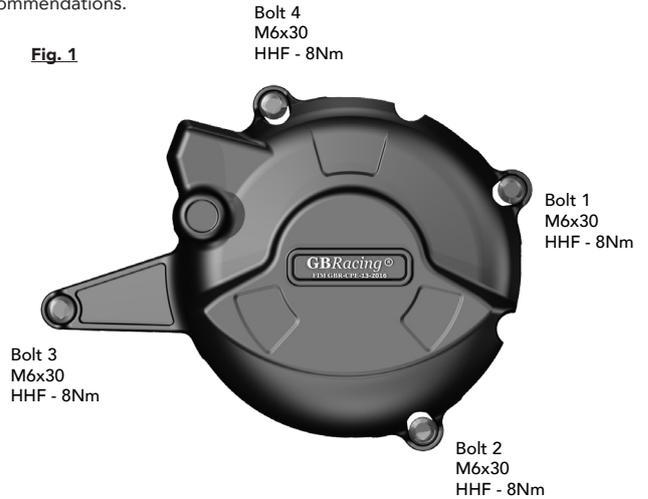

## SECONDARY CLUTCH COVER PART NO. EC-899-2014-2-GBR

1. Remove the right hand side fairing panel.
2. Remove the 3 standard bolts plus the right hand side bolt that holds the rear brake reservoir bracket as shown in Fig. 1 at Bolt position 1.
3. Place the 2mm spacer supplied over the 5mm stud at Bolt position 1.
4. Place the secondary clutch cover against the standard clutch cover.
5. Insert the 3 supplied bolts plus the original bolt at Bolt position 1 and tighten to 8Nm as per Manufacturer's recommendations.  
DO NOT OVERTIGHTEN
6. Replace the right hand side fairing panel.

Fig. 1

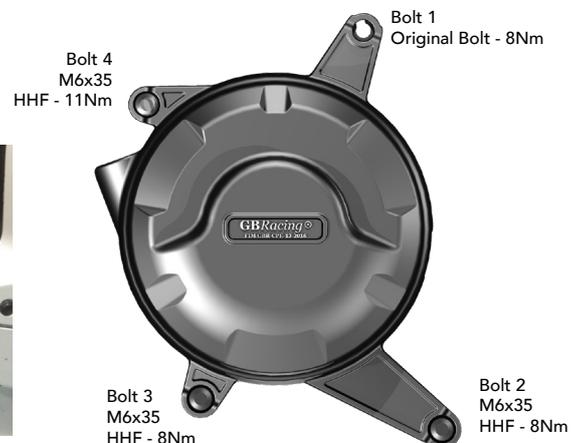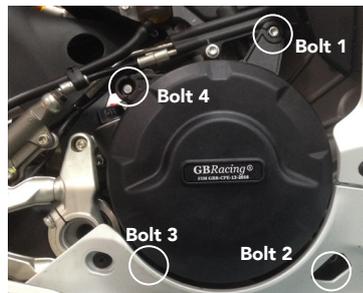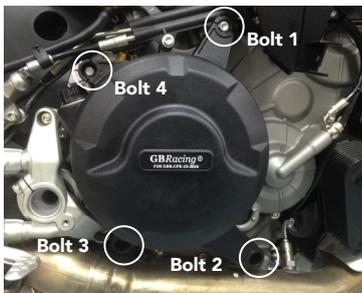

**Engine Cover Set: EC-1199-2012-SET-GBR**

EC-899-2014-1-GBR, EC-899-2014-2-GBR

[www.GBRacing.eu](http://www.GBRacing.eu)