


THIS SHEET INCLUDES FITTING INSTRUCTIONS FOR THE FOLLOWING PARTS:

Secondary Alternator Cover Part No. EC-M3H-2012-1-GBR / Secondary Clutch Cover Part No. EC-M3H-2012-2-GBR

Secondary Oil Protection Lid 1 Part No. EC-M3H-2012-OPL-1 / Secondary Oil Protection Lid 2 Part No. EC-M3H-2012-OPL-2

## SECONDARY ALTERNATOR COVER PART NO. EC-M3H-2012-1-GBR


- 1 Remove 3 existing bolts from the stock Alternator cover, shown as position Bolt 1, 2 & 3.
- 2 Place the Secondary Alternator Cover over the stock cover.
- 3 Assemble 3 replacement stainless steel bolts loosely in the correct position as shown.
- 4 Tighten bolts to a Torque of 10Nm. DO NOT OVERTIGHTEN.



Bolt 1  
M6x35 - 10Nm

Bolt 2  
M6x35 - 10Nm

Bolt 3  
M6x35 - 10Nm

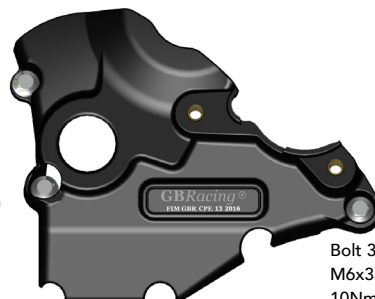


## SECONDARY CLUTCH COVER PART NO. EC-M3H-2012-2-GBR

- 1 Remove Upper fairing.
- 2 Remove 3 existing bolts from the stock clutch cover, shown as position Bolt 1, 2 & 3.
- 3 Place the Secondary Clutch Cover over the stock cover.
- 4 Assemble 3 replacement M6x35 bolts, loosely in the correct position as shown.
- 5 Tighten bolts to a Torque of 10Nm. DO NOT OVERTIGHTEN.
- 6 Re-Fit Upper Fairing.

Bolt 1  
M6x35 - 10Nm

Bolt 2  
M6x35 - 10Nm

Bolt 3  
M6x35 - 10Nm

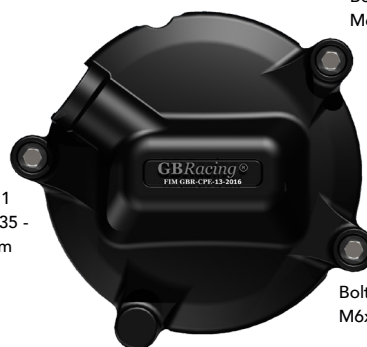

## SECONDARY OIL PROTECTION LID 1 PART NO. EC-M3H-2012-OPL-1


- 1 Remove 3 existing bolts from the stock Pulse cover, shown as position Bolt 1, 2, & 3.
- 2 Place the Secondary Oil Protection Cover over the Alternator Cover.
- 3 Assemble 3 replacement bolts loosely in the correct position as shown.
- 4 Tighten bolts to a Torque of 10Nm as per Manufacturer's recommendations. DO NOT OVERTIGHTEN.



Bolt 1  
M6x16A2CSK - 10Nm

Bolt 2  
M6x80A2 - 10Nm

Bolt 3  
M6x16A2CSK - 10Nm

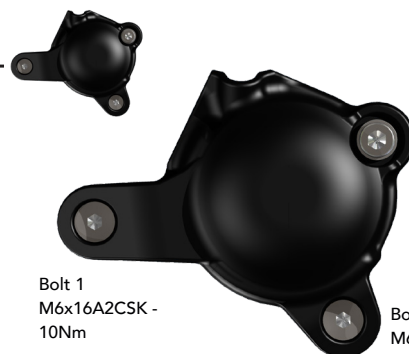

## SECONDARY OIL PROTECTION LID 2 PART NO. EC-M3H-2012-OPL-2


- 1 Remove 3 existing bolts from the stock Pulse cover, shown as position Bolt 1, 2, & 3.
- 2 Place the Secondary Oil Protection Cover over the Alternator Cover.
- 3 Assemble 3 replacement bolts loosely in the correct position as shown.
- 4 Tighten bolts to a Torque of 10Nm as per Manufacturer's recommendations. DO NOT OVERTIGHTEN.



Bolt 1  
M6x16A2CSK - 10Nm

Bolt 2  
M6x80A2 - 10Nm

Bolt 3  
M6x16A2CSK - 10Nm

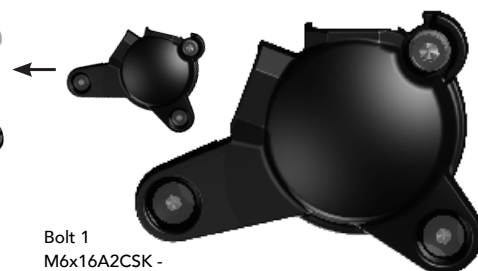

SOLD SEPARATELY