


FITTING INSTRUCTIONS TO BE FITTED BY A QUALIFIED TECHNICIAN






GBRacing[®]

Secondary Alternator Cover Part No. EC-F4-2012-1-GBR / Secondary Clutch Cover Part No. EC-F4-2012-2-GBR

SECONDARY ALTERNATOR COVER PART NO. EC-F4-2012-1-GBR


- 1 Remove the middle fairing section using the 9 Zeus fastners.
- 2 Remove the 4 existing bolts from the stock aluminium Alternator cover, shown as position Bolt 1, 2, 3 & 4.
- 3 Place the Secondary Alternator Cover over the stock aluminium cover.
- 4 Loosely screw down all bolts using the supplied M6 x 30mm replacement bolts.
- 5 Tighten bolts to a Torque of 11 Nm as per Manufacturer's recommendations. DO NOT OVERTIGHTEN.
- 6 Refit the Fairing.

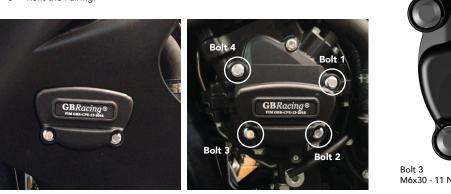

Bolt 4 M6x30 - 11 Nm Bolt 1 M6x30 - 11 Nm GBRacing O FIM GBR-CPE-13-2016 Bolt 3 M6x30 - 11 Nm

SECONDARY CLUTCH COVER PART NO. EC-F4-2012-2-GBR

- 1 Remove the RHS fairing panel via the Dzus fasteners.
- 2 Remove 4 existing bolts from the stock Clutch cover, shown as position Bolt 1, 2, 3 & 4.
- 3 Place the Secondary Clutch Cover over the stock cover.
- 4 Assemble 4 replacement bolts loosely in the correct position as shown.
- 5 Tighten bolts to a Torque of 8 Nm as per manufacturer's recommendations.
- 6 Replace fairing panel. DO NOT OVERTIGHTEN.





Engine Cover Set: EC-F4-2012-SET-GBR EC-F4-2012-1-GBR, EC-F4-2012-2-GBR

www.GBRacing.eu

DO NOT use these products unless you agree to our Terms & Conditions, as shown on our paperwork and website. If you do not agree, please return the product(s) to your dealer for a refund.