FITTING INSTRUCTIONS



THIS SHEET INCLUDES FITTING INSTRUCTIONS FOR THE FOLLOWING PARTS:


Secondary Alternator Cover Part No. EC-MT10-2015-1-GBR / Secondary Clutch Cover Part No. EC-MT10-2015-2-GBR / Secondary Pulse Cover Part No. EC-MT10-2015-3-GBR

Bullet Frame Race Slider Set - STREET - Part No. FS-R1-2015-S / Yamaha 6mm Paddock Stand / Bobbin Set Part No. BA12-6-GBR-SET / Lower Chain Guard Part No. CGA10-GBR



SECONDARY ALTERNATOR COVER PART NO. EC-MT10-2015-1-GBR


- 1. Remove 4 existing bolts from the stock Alternator cover, shown as position Bolt 1, 2, 3 & 4.
- 2. Place the Secondary Alternator Cover over the stock cover.
- 3. Assemble 4 replacement bolts loosely in the correct position as shown.
- 4. Tighten bolts to a Torque of 12Nm as per Manufacturer's recommendations. DO NOT OVERTIGHTEN.

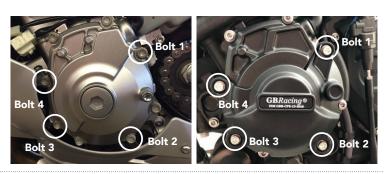



SECONDARY CLUTCH COVER PART NO. EC-MT10-2015-2-GBR


- 1. Remove 4 existing bolts from the stock Clutch cover, shown as position Bolt 1, 2, 3 & 4.
- 2. Place the Secondary Clutch Cover over the stock cover.
- 3. Assemble 4 replacement bolts loosely in the correct positions as shown.
- Tighten bolts to a Torque of 12Nm as per Manufacturer's recommendations. DO NOT OVERTIGHTEN.

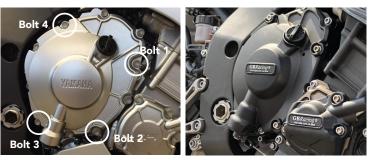



SECONDARY PULSE COVER PART NO. EC-MT10-2015-3-GBR

- 1. Remove 3 existing bolts from the stock pulse cover, shown as position Bolt 1, 2 & 3.
- 2. Place the Secondary Pulse Cover over the stock cover.
- 3. Assemble 3 replacement bolts loosely in the correct positions as shown.
- 4. Tighten bolts to a Torque of 12Nm as per Manufacturer's recommendations. DO NOT OVERTIGHTEN.

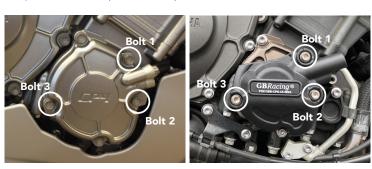

Bolt 3 M6X35A2: 12Nm

Bolt 1

M6X35A2: 12Nm

FITTING INSTRUCTIONS TO BE FITTED BY A QUALIFIED TECHNICIAN



BULLET FRAME SLIDER - LEFT HAND SIDE - STREET PART NO. FS-R1-2015-LHS-S

- 1 Remove upper engine mounting bolt, located through the fairing opening.
- 2 Assemble bolt through the aluminium bush into correct position.
- 3 Tighten to 70NM torque.
- 4 Slide bullet moulding onto aluminium bush.
- 5 Screw M6 bolt into front of bullet moulding hand tight.

BULLET FRAME SLIDER - RIGHT HAND SIDE - STREET PART NO. FS-R1-2015-RHS-S

- 1 Remove upper engine mounting bolt, located through the fairing opening (ensuring that the OE Washer is not removed).
- 2 Assemble bolt through the aluminium bush into correct position.
- 3 Tighten to 70NM torque.
- 4 Slide bullet moulding onto aluminium bush.
- 5 Screw M6 bolt into front of bullet moulding hand tight.

PADDOCK STAND / BOBBIN SET PART NO. BA12-6-GBR-SET

- Assemble M6 x 40mm Bolt & M6 Washer fthrough the moulded bobbin. 1
- 2 Tighten bolts to swing arm boss, 8 Nm.
 - DO NOT OVERTIGHTEN





CPM-3

M12x1.25x50

CPB-12-10



2 x M6 x 40 Bolts

1 x M6 Washer



2 x Bolts & Washers

LOWER CHAIN GUARD PART NO. CGA10-GBR

- 1 Assemble 2 bolts and washers through the lower chain guard into the Black Anodised aluminium mounting block CGA10-2.
- 2 Position the assembly underneath the swing arm, closing the gap to the rear sprocket.
- Note : There should be a 5mm minimum gap from the bike chain to the lower chain guard.
- 3 Mark off the chosen hole positions.
- 4 Drill & Tap the marked holes , M6 (Drill 5mm Dia. for tapping)
- Disassemble the Black Anodised block from the assembly, and mount the block 5 to the underside of the swing arm using the remaining 2 bolts and washers.
- 6 Re-assemble the lower chain guard to the fixed bracket.



www.GBRacing.eu

Protection Bundle STREET: CP-MT10-2015-CS-GBR

EC-MT10-2015-1-GBR, EC-MT10-2015-2-GBR, EC-MT10-2015-3-GBR, CGA10-GBR, FS-R1-2015-S, BA12-6-GBR-SET

Engine Cover Set: EC-MT10-2015-SET-GBR

EC-MT10-2

SET & BUNDLE: